


### H-3 Mk4 Limited

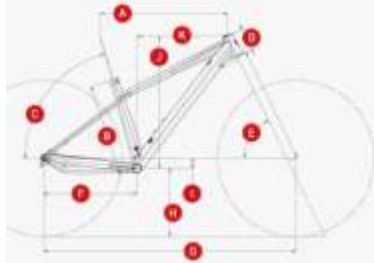

Framesize empfohlene Körpergröße		S 158 - 168 cm	M 168 - 178 cm	L 176 - 186 cm	XL 184 - 194 cm	XXL 2 - 202 cm
<b>A</b>	Oberrohrlänge	578,5 mm	605,5 mm	634,8 mm	657,7 mm	80,6 mm
<b>B</b>	Sitzrohrlänge	417 mm	440 mm	470 mm	490 mm	510 mm
<b>C</b>	Sitzrohrwinkel effektiv	74,3°	75°	75°	75°	75°
<b>D</b>	Steuerrohrlänge	100 mm	100 mm	115 mm	120 mm	135 mm
<b>E</b>	Lenkwinkel	64°	64,8°	64,8°	64,8°	64,8°
<b>F</b>	Kettenstrebenlänge	422 mm	427 mm	432 mm	437 mm	442 mm
<b>G</b>	Radstand	1143,6 mm	1177,0 mm	1208,6 mm	1243,0 mm	267,4 mm
<b>H</b>	Tretlagerhöhe	310 mm	304 mm	304 mm	304 mm	304 mm
<b>I</b>	Tretlagerabsenkung	45 mm	70 mm	70 mm	70 mm	70 mm
<b>J</b>	Stack	599 mm	623 mm	636,6 mm	645,5 mm	54,4 mm
<b>K</b>	Reach	410 mm	438 mm	463 mm	483 mm	503 mm

### H-3 Mk4 Limited AXS

### H-3 Mk4 PRO XTR

### H-3 Mk4 Elite



Framesize empfohlene Körpergröße		S 158 - 168 cm	M 168 - 178 cm	L 176 - 186 cm	XL 184 - 194 cm	XXL 192 - 202 cm
<b>A</b>	Oberrohrlänge	578,5 mm	608,1 mm	637,5 mm	660,4 mm	683,3 mm
<b>B</b>	Sitzrohrlänge	417 mm	440 mm	470 mm	490 mm	510 mm
<b>C</b>	Sitzrohrwinkel effektiv	74,3°	74,2°	74,2°	74,2°	74,2°
<b>D</b>	Steuerrohrlänge	100 mm	100 mm	115 mm	120 mm	135 mm
<b>E</b>	Lenkwinkel	64°	64°	64°	64°	64°
<b>F</b>	Kettenstrebenlänge	422 mm	427 mm	432 mm	437 mm	442 mm
<b>G</b>	Radstand	1143,6 mm	1181,5 mm	1218,1 mm	1247,5 mm	1276,8 mm
<b>H</b>	Tretlagerhöhe	310 mm	310 mm	310 mm	310 mm	310 mm
<b>I</b>	Tretlagerabsenkung	45 mm	64 mm	64 mm	64 mm	64 mm
<b>J</b>	Stack	599 mm	629 mm	643 mm	652 mm	660 mm
<b>K</b>	Reach	410 mm	430 mm	455 mm	475 mm	495 mm